



EIBENSTOCK

NEW




USD 182

The braceable drill stand for drilling in ceiling, floor and wall up to Ø 182 mm without dowel fastening



- The drill stand can be braced between the floor and ceiling using a telescopic tripod system
- No mounting damage to the wall, floor or ceiling as with „conventional“ drill stands, fast and without dowels
- For EIBENSTOCK diamond core drills as well as core drills of various manufacturers with max. 60 mm clamping collar
- Drilling in floor, wall and ceiling possible, stable, solid ceiling is required
- In the case of unstable ceilings, the USD 182 can also be mounted using dowel fastening
- Flexible, stepless adjustment of drilling height by crank feed

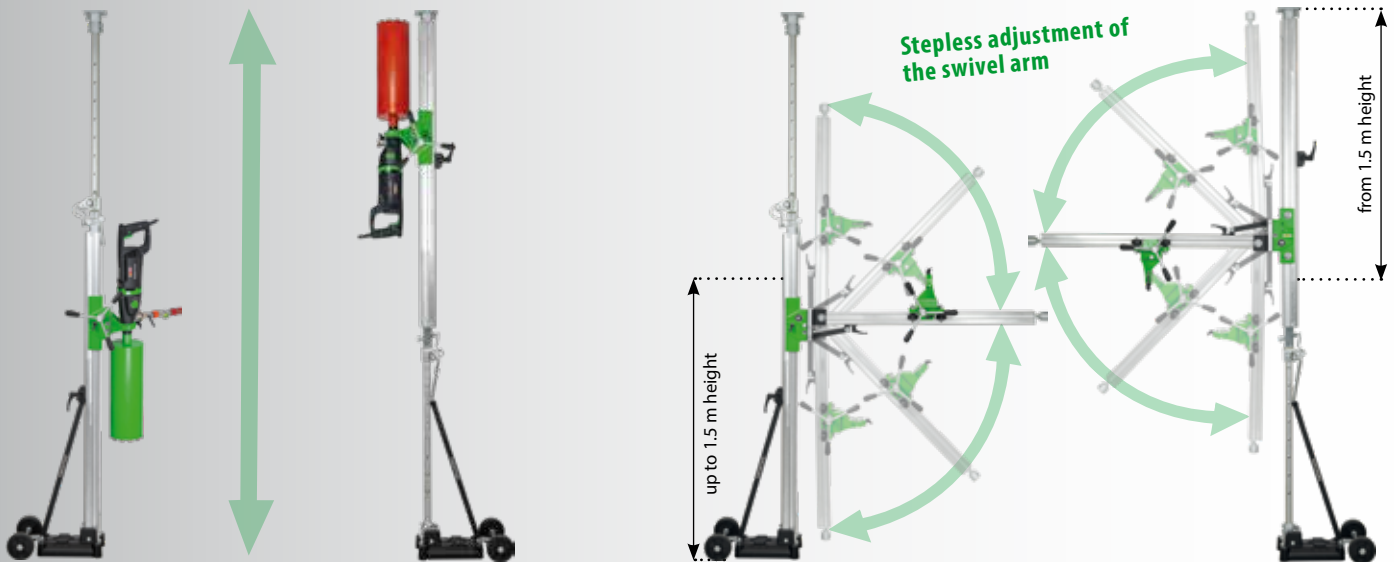


Vertical holes:
Machine mount is mounted directly on column

Specifications	USD 182
Max. drilling diameter	182 mm
Machine mounting	collar mounting Ø 60 mm
Max. telescopic length	3018 mm
Machine swivel arm	1160 mm
Weight	39.9 kg
Order no.	096U1000

USD 182 with feed lever, allen key

Reducing ring for mounting



If required, also order!

Elektrowerkzeuge GmbH Eibenstock
Auersbergstraße 10
08309 Eibenstock, Germany

Phone: +49 37752 503-0
Web: www.eibenstock.com
E-Mail: office@eibenstock.com

Certified according to DIN EN ISO 9001:2015
Technical changes excepted! Illustrations may vary!

Your dealer: